



Revision Dates						
5/00	5/01	4/02	3/07	7/10	10/13	3/23
						9/


INITIALS	DESIGN	DATE	DETAIL	DATE	QUANTITY	DATE
By						
Checked By						

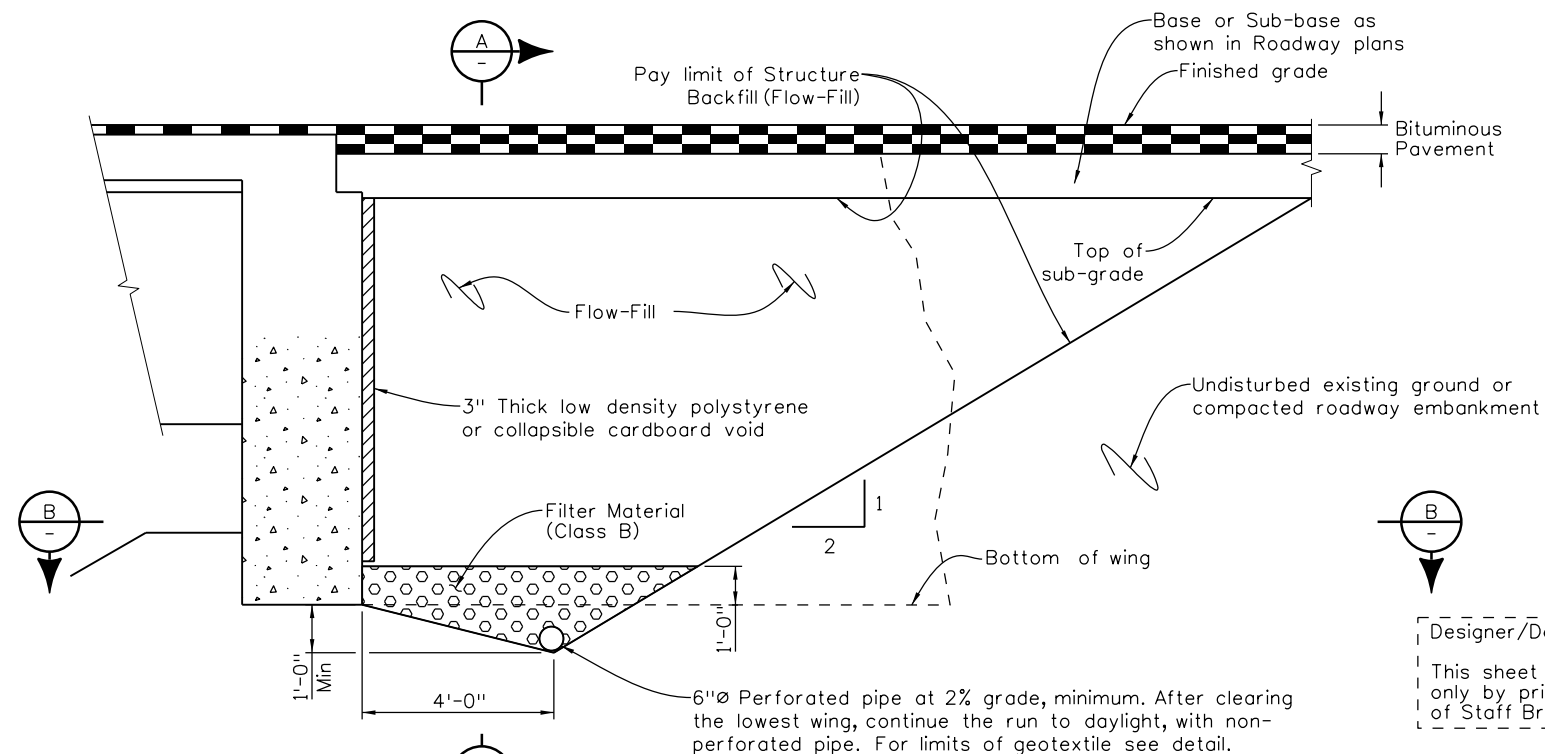

SECTION PERPENDICULAR TO ABUTMENT

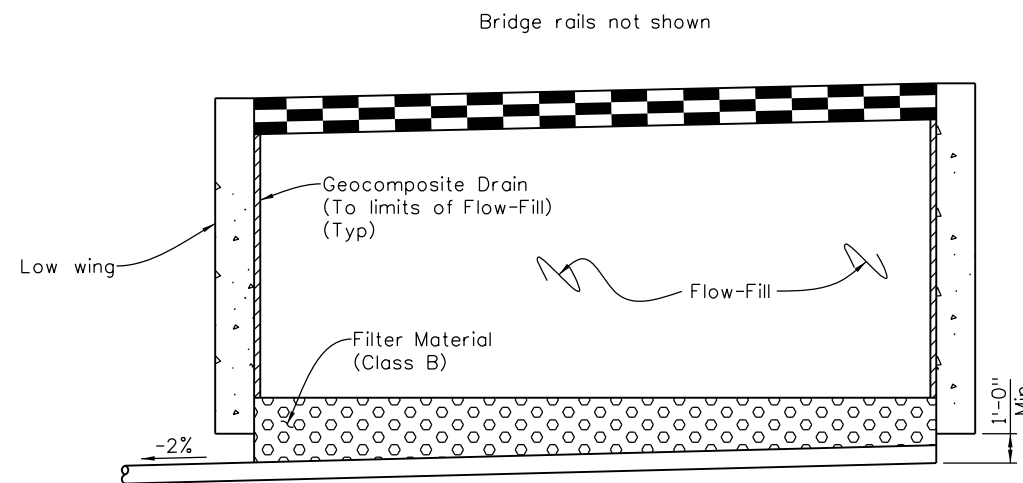

SECTION 

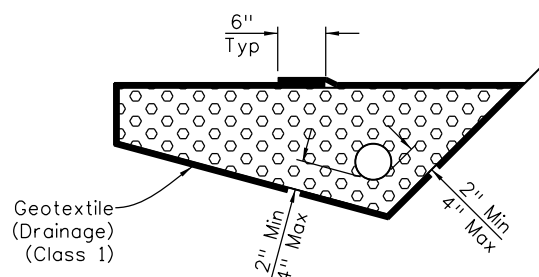

6 INCH PERFORATED
PIPE UNDERDRAIN

6 Inch Perforated Pipe Underdrain includes all Filter Material (Class B) and Geotextile (Drainage) (Class 1) surrounding the Filter Material (Class B)

NOTES:

1. The maximum lift thickness for Structure Backfill (Flow-Fill) shall be 3 feet. Additional layers shall not be placed until the Structure Backfill (Flow-Fill) has lost sufficient moisture to be walked on without indenting more than 2 inches.
2. Payment will be made under Item 206 Structure Backfill (Flow-Fill) and shall include the cost for polystyrene or cardboard void, Geocomposite Drain, 6 Inch Perforated Pipe Underdrain, and Subsurface Drain Outlet (6" non-perforated pipe).
3. Installation of Pipe Underdrain, Subsurface Drain Outlet, and Geocomposite Drain will conform to the Construction requirements of Section 605.03, 605.06 and 605.04, respectively.

All seals for this set of drawings are applied to the cover page(s)	Print Date: \$DATES\$	<div></div> <div></div> <div></div> <div></div> <div></div>	Sheet Revisions			Colorado Department of Transportation		As Constructed		STRUCTURE BACKFILL (FLOW-FILL) (W/O APPROACH SLAB)			Project No./Code		
	File Name: Sheet_B-206-F2.dgn		Date:	Comments	Init.	<div></div> <div>2829 West Howard Place, 3rd Floor Denver, CO 80204 Phone: 303-512-4079 FAX: 303-757-9197</div> <div>Staff Bridge Branch</div>	<div></div> <div></div> <div></div> <div></div>	No Revisions:		Designer: XXXXXXXX Detailer: XXXXXXXX		Structure Numbers	X-XX-XX	Project Number	
	Horiz. Scale: As Noted Vert. Scale: As Noted							X-XX-XX	Code						
	Unit Information Unit Leader Initials								Void:	Sheet Subset: BRIDGE		Subset Sheets: BXX of XXX	Sheet Number		